




Double-sided non-woven tissue adhesive tape

Reference: 01 2958X1X 11

Product profile

Open side adhesive:	Acrylic - 70 g/m ²
Carrier:	Non-woven tissue
Closed side adhesive:	Acrylic - 70 g/m ²
Liner:	Glassine paper - 80 g (0.065 mm), white
Total thickness excluding liner:	0.15 mm

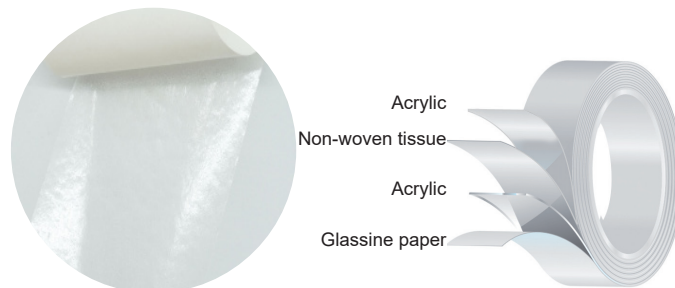

Application

Using the **Gergonne WRA^{tech} technology**, this double-sided non-woven tissue tape is mainly used for assembly and fastening applications and is particularly adapted to the constraints of flexible materials converters (foams, felts, non-wovens, fabrics, films).

Technical Properties

90° peel strength (N/25 mm - NF EN ISO 29862)	Steel	ABS	Polypropylene
After 24 hours	17	15	12
Tack (N/25 mm - FTM9)	Steel	ABS	Polypropylene
After 1 min	19	-	-
Shear strength (NF EN ISO 29863 - 1 kg sur 25x25 mm)	Steel	ABS	Polypropylene
At 22 °C	>100 h	-	-
At 80 °C	15 min	-	-
Additional features			
Temperature range	- 40 °C / + 120 °C		
European directives	2000/53/CE, 2002/95/CE, REACH		

Product features

- Very good adhesion on all types of substrates (including low surface energy)
- Excellent resistance to UV and ageing
- Non-woven carrier particularly suitable for half-flesh cutting and/or the hand tearable aspect is important
- This versatile product will be able to adapt to a wide range of materials

Recommendations for use

The surface to be glued should be clean and dry, free from grease, silicone or dust. At the time of application, the adhesive tape as well as the surface to which it is to be adhered, should be at a temperature of between 18 and 30 °C. The adhesive should be applied with a pressure of 0.02 MPa for 2 seconds. A dwell period of 24 hrs is then needed to reach the optimum bond or before carrying out any tests.

This document does not constitute a specification. The information provided in this document is given in good faith, according to the tests made in our laboratory. The values given are typical values and may vary according to application conditions. They are given for information only and do not constitute a warranty. It is the responsibility of the purchaser to determine prior to use the suitability of this material in its application. Revised: February 17th 2021



Double-sided non-woven tissue adhesive tape

Storage

Store in dry conditions between 10 °C and 35 °C in its original packaging. Use within 12 months after delivery.



The **Gergonne WRA^{tech} technology** allows the development of top-of-the-range products combining exceptional bonding performance with very high resistance to water, temperature and ageing.
The products are free of solvents.
The solvents used in the manufacturing process are treated with a state-of-the-art incinerator, the largest in France. Releases are half as low as the limits imposed by French and European legislation