


Single-sided polyester adhesive tape

Reference: 01 2670E3X 01

Product profile

Carrier: Polyester film
 Closed side adhesive: Acrylic - 18 g/m²
 Liner: Polyester film (0.036 mm), clear
 Total thickness excluding liner: 0.07 mm

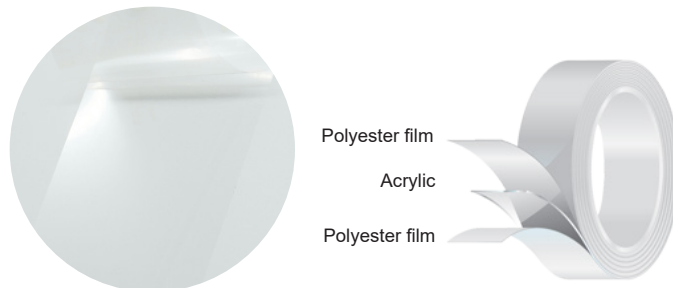

Application

Using acrylic adhesive chemistry, this single-sided polyester has a removable adhesive mass. It is mainly used for surface protection applications, carrier tape for the converting industry or application tape.

Technical Properties

90° peel strength (N/25 mm - NF EN ISO 29862)	Steel	ABS	Polypropylene
After 24 hours	1	1	1
Tack (N/25 mm - FTM9)	Steel	ABS	Polypropylene
After 1 min	1	-	-
Additional features			
Temperature range	- 40 °C / + 120 °C		
European directives	2000/53/CE, 2002/95/CE, REACH		

Product features

- Transparent and removable product without residue
- Excellent resistance to UV and ageing
- Rigid polyester carrier providing a good handling of the product
- Siliconized polyester liner offering transparency and tear resistance

Recommendations for use

The surface to be glued should be clean and dry, free from grease, silicone or dust. At the time of application, the adhesive tape as well as the surface to which it is to be adhered, should be at a temperature of between 18 and 30 °C. The adhesive should be applied with a pressure of 0.02 MPa for 2 seconds. A dwell period of 24 hrs is then needed to reach the optimum bond or before carrying out any tests.

Storage

Store in dry conditions between 10 °C and 35 °C in its original packaging. Use within 12 months after delivery.