


Single-sided polyester adhesive tape

Reference: 01 2675E3X 00

Product profile

Adhesive: Acrylic - 18 g/m²
 Carrier: Siliconised polyester film
 Total thickness excluding liner: 0.05 mm

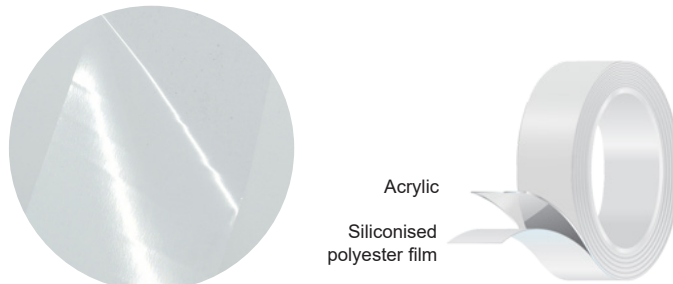

Application

Using acrylic adhesive chemistry, this single-sided polyester has a removable adhesive mass. It is mainly used for surface protection applications, carrier tape for the converting industry or application tape.

Technical Properties

90° peel strength (N/25 mm - NF EN ISO 29862)	Steel	ABS	Polypropylene
After 24 hours	2	2	2
Tack (N/25 mm - FTM9)	Steel	ABS	Polypropylene
After 1 min	2	-	-
Additional features			
Temperature range	- 40 °C / + 120 °C		
European directives	2000/53/CE, 2002/95/CE, REACH		

Product features

- Removable product without residue (different levels of adhesion available)
- Excellent resistance to UV and ageing
- Rigid polyester carrier providing a good handling of the product
- Thanks to its carrier with siliconized backside, this product does not need a liner

Recommendations for use

The surface to be glued should be clean and dry, free from grease, silicone or dust. At the time of application, the adhesive tape as well as the surface to which it is to be adhered, should be at a temperature of between 18 and 30 °C. The adhesive should be applied with a pressure of 0.02 MPa for 2 seconds. A dwell period of 24 hrs is then needed to reach the optimum bond or before carrying out any tests.

Storage

Store in dry conditions between 10 °C and 35 °C in its original packaging. Use within 12 months after delivery.